
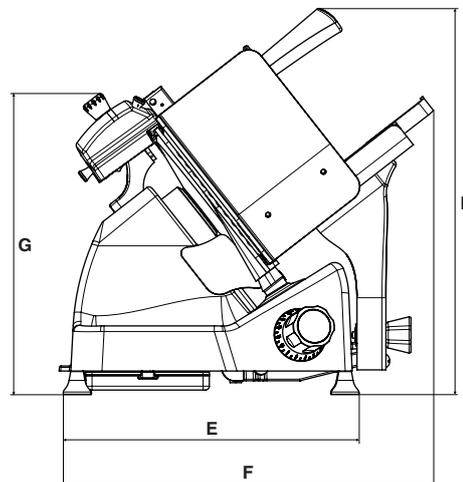


**CARATTERISTICHE TECNICHE | DATA SHEET  
DONNÉES TECHNIQUES | TECHNISCHE DATEN**

**PRO LINE XS 25-30**

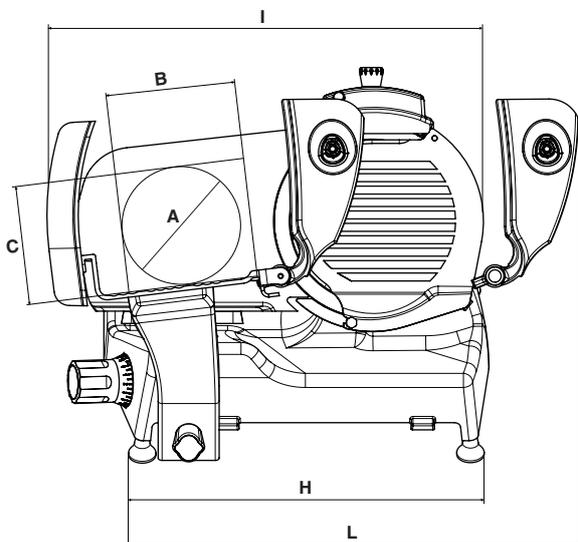

	<b>SPECIFICHE   SPECIFICATIONS SPÉCIFICATIONS   TECHNISCHE MERKMALE</b>	
	<b>XS 25</b>	<b>XS 30</b>
<b>Ø Lama   Ø Blade   Ø Lame   Ø Messer</b>	9,84"	11,81"
<b>Spessore taglio   Cut thickness Epaisseur de coupe   Schnittbreite</b>	0 - 0.55"	0 - 0.55"
<b>Capacità di taglio circolare   Capacity (circle) Capacité (cercle)   Leistung (Kreis)</b>	7,40"	9,06"
<b>Capacità di taglio rettangolare Capacity (rectangle) Capacité (rectangle) Leistung (Rechteck)</b>	8.85x7"	9.46x7.67"
<b>Peso netto   Net weight Poids net   Nettogewicht</b>	41,90 lb	64 lb
<b>Potenza motore   Motor rating Puissance moteur   Motorleistung</b>	0,33 kW	0,35 kW
<b>Specifiche elettriche Electrical specifications Caractéristiques électriques Elektrische Eigenschaften</b>	115 V 60 Hz 1 PH 115 V 60 Hz 1 PH	

	<b>DIMENSIONI DIMENSIONS   MASSE</b>	
	<b>XS 25</b>	<b>XS 30</b>
<b>A</b>	7,40"	9,06"
<b>B</b>	8,86"	9,65"
<b>C</b>	7,01"	7,68"
<b>D</b>	19,88"	21,46"
<b>E</b>	14,88"	16,34"
<b>F</b>	18,90"	23,43"
<b>G</b>	17,52"	17,13"
<b>H</b>	17,72"	19,92"
<b>I</b>	22,24"	25,20"
<b>L</b>	22,64"	25,39"

*Nota: A seguito della continua ricerca per migliorare sempre i nostri prodotti, le specifiche tecniche sono soggette a possibili variazioni  
Note: As we actually strive to improve our products, specifications are necessarily subject to change without notice  
Remarque: En raison de la recherche continue pour améliorer nos produits, les spécifications techniques sont sujettes à des possible variations  
Anmerkung: Aufgrund der ständigen Forschung für die Verbesserung unserer Produkte, die Produktionsvorgabe können Änderungen zeigen*